



110% Self Bunded

BAFFLED PC CUBE SERIES

For the storage and dispensing of Diesel, Kerosene, Lubricants, Petrol and Waste Oil.



The PC Cube is a market leading self bunded tank, with versatile under-hatch connections and an intelligent design certified for lifting when full (Up to PC6.6).

FEATURES:

- Unique tank in tank design approved to UL142 / ULCS601 / AS1940, AS1692, AS1170, AS4100, AS1554.1 / BS799 / PPG2.
- Certified Crane Lifting Points (Up to and including PC6.6)
- Removable manway for ease of maintenance.
- The outer tank will hold 110% of the inner tank's capacity.
- UN31A/Y approved for the transport of Dangerous Goods by Road, Rail and Sea, Packaging Groups II & III. (PC0.66 - PC2.25)
- Lockable hatch lid with access for hoses, under hatch sockets and suction spears can operate with the hatch closed.
- Additional 50mm (2") hose entry and exit sockets on top of tank.
- Secure under-hatch generator hose suction and return points, to accommodate up to 3 generators.
- 4 x way forklift pockets.
- Incremental dipstick.
- Stackable - 3-high empty and 2-high when full.
- Supplied with all required statutory decals.
- Movable when full



We are proud to announce that **PETRO Industrial** has passed all of the audits and scrutiny applied by SAI Global, leading to the certification of our Quality Systems and Processes to **ISO9001:2015**.

View online at:
www.petrohire.com.au





PRODUCT RANGE:

Please see the range of PETRO PC Cube Self Bunded Tanks below:

Code	Gross Volume (L)	Safe Fill Level (L)	External Dimensions (L x W x H) (mm)	Tare Weight (kg)
PC 0.66	660	600	1374 x 1086 x 810	451
PC 1.1	1100	1000	1374 x 1086 x 1270	594
PC 2.25	2250	2000	2294 x 1086 x 1270	885
PC 3.3	3300	3000	2294 x 1546 x 1270	1096
PC 4.5	4500	4000	2294 x 2084 x 1270	1328
PC 6.6	6600	6000	2966 x 2294 x 1270	1809
PC 8.8	8800	8000	3916 x 2294 x 1270	2170
PC 11	11000	10000	4876 x 2294 x 1270	2689

COMES WITH:

- 1 x 25mm (1") Suction Spear
- 2 x 13mm (1/2") Suction Spear
- 3 x 40mm (1 1/2") Return Point
- 1 x Spare 80mm (3") Socket
- 4 x Spare 50mm (2") Socket Top of Tank
- 50mm (2") Fill Point - Splash Fill Only
- Incremented Dip Stick (Select Models)
- Statutory Signage
- 4 Way Forklift Pockets
- Certified Lift Full Crane Lugs on Each Corner (Up to and including PC6.6)
- Finish Painted PETRO White Marine Specification



PETRO

HIRE

petrohire.com.au

CERTIFICATIONS




Certificate of Compliance
#20121129-MH49493 for
UL 142, ULC-S601, and
ULC-S653.




WS1010 Proof Load Test
Certificate Nata v2.2,
#1,548. Accreditation No.
17109. Accredited for
Compliance with ISO/IEC
17025.



Decals manufactured to
comply with AS1319 and
AS2700.

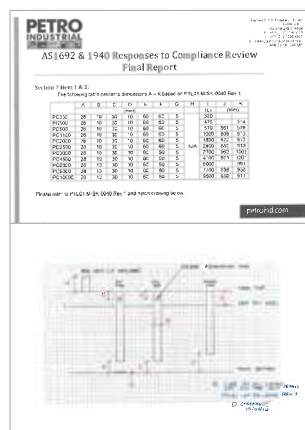

Internal Piping Dimensions
Compliance Review
Final Report. AS1692 and
AS1940.

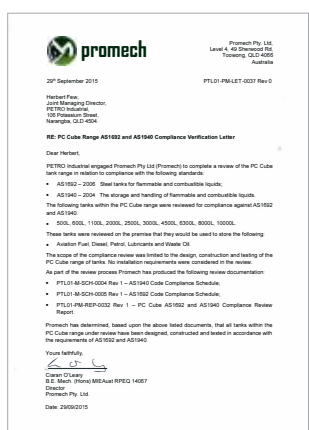

Cube Range AS1692
and AS1940 Compliance
Verification.

PETRO Contact Information

AUSTRALIA

Eastern Australia

Factory 2, 106 Potassium Street
PO Box 407
Narangba QLD 4504
P: 1300 987 789
E: sales@petroindustrial.com.au

Western Australia

173 Mulgul Road
Malaga WA 6090
P: 1300 987 789
E: sales@petroindustrial.com.au

AFRICA

South Africa

Factory 14 Bentonite Street
Alrode, Alberton, Johannesburg
South Africa
P: +27 (0)11 864 7758
F: +27 (0) 11 864 1649
E: sales@petroindustrial.co.za

MIDDLE EAST

Dubai

Office LB17233, Lobby Building 17
Jebel Ali Free Zone
PO Box 18602
Dubai, United Arab Emirates
P: +971 488 76688
E: salesuae@petroind.com



petroind.com